

# CABLE CLEATS



Tab 1

**NON-METALLIC CABLE CLEATS  
- SINGLE CABLE (FOR INDOOR/OUTDOOR USE)**

Item Code	Cable Dia. (mm)
DSSB-CC-SNC1827	18-27
DSSB-CC-SNC1827S	18-27
DSSB-CC-SNC2842	28-42
DSSB-CC-SNC2842S	28-42
DSSB-CC-SNC2935	29-35
DSSB-CC-SNC4356	43-56
DSSB-CC-SNC5476	54-76
DSSB-CC-SNC7488	74-88
DSSB-CC-SNC87102	87-102
DSSB-CC-SNC103116	103-116
DSSB-CC-SNC117138	117-138
DSSB-CC-SNC139180	139-180



**Cable Cleats**



Classification According to : IEC 61914

[Click Here For product Flyer](#)

## TREFOIL NON-METALLIC CABLE CLEATS FOR THREE CABLE

Item Code	Cable Dia. (mm)	Type
DSSB-CC-TNC24 **	22 - 24	T1
DSSB-CC-TNC27*	25 - 27	T2
DSSB-CC-TNC30 **	28 - 30	T1
DSSB-CC-TNC33*	31 - 33	T2
DSSB-CC-TNC36	34 - 36	T1
DSSB-CC-TNC40*	37 - 40	T2
DSSB-CC-TNC44	41 - 44	T1
DSSB-CC-TNC47	45 - 47	T1
DSSB-CC-TNC50*	48 - 50	T2
DSSB-CC-TNC53	51 - 53	T1
DSSB-CC-TNC55	54 - 55	T1
DSSB-CC-TNC57 *	56 - 57	T1
DSSB-CC-TNC60*	56 - 60	T2
DSSB-CC-TNC65	64 - 65	T1
DSSB-CC-TNC67	66 - 67	T1
DSSB-CC-TNC70	68 - 70	T1
DSSB-CC-TNC73*	71 - 73	T2
DSSB-CC-TNC77	74 - 77	T1
DSSB-CC-TNC81 **	78 - 81	T1
DSSB-CC-TNC85 **	82 - 85	T1
DSSB-CC-TNC93	91 - 93	T1
DSSB-CC-TNC96 **	94 - 96	T1
DSSB-CC-TNC99*	97 - 99	T2
DSSB-CC-TNC102 **	100 - 102	T1
DSSB-CC-TNC105 **	103 - 105	T1
DSSB-CC-TNC109 **	106 - 109	T1
DSSB-CC-TNC112*	110 - 112	T2



'\*\*' non stock item minimum quantities apply.

\*' Trefoil Cleats Type.2.

Other size please send / call for enquiry





Classification According to : IEC 61914

[Click Here For Product Flyer](#)

## QUADRUPLE NON-METALLIC CABLE CLEATS (FOR 4 CABLES)

Item Code	Cable Dia. (mm)
DSSB-CC-QNC4650	46 - 50
DSSB-CC-QNC3842	38 - 42
DSSB-CC-QNC3337	33 - 37
DSSB-CC-QNC2428	24 - 28
DSSB-CC-QNC1519	15 - 19

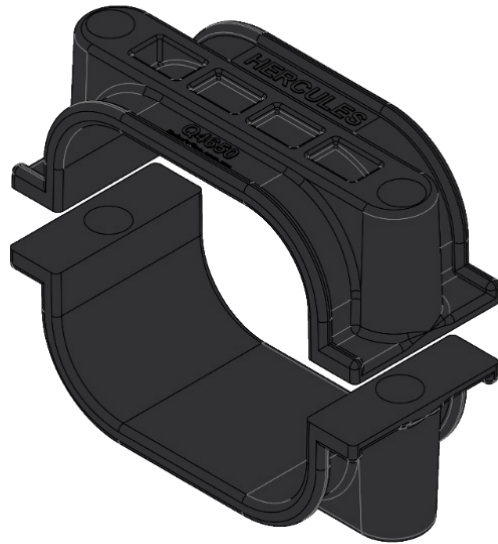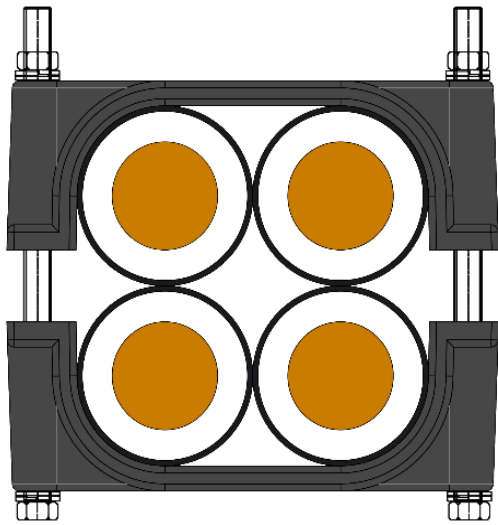

Cable Cleats

**TREFOIL NON-METALLIC BASE (UV RESISTANT)**

Item Code	Non-Metallic		Non-Ferrous Metal	
	Trefoil	Single	Trefoil	Single
<b>DSSB-CC-TB2849 (M8 &amp; M10)</b>	TNC 27	SNC 2842	TAC 27	SAC 2838
	TNC 30	SNC 2935	TAC 30	SAC 3953
	TNC 33	SNC 4356	TAC 32	SAC 5468
	TNC 36	SNC 5476	TAC 33	SAC 6682
	TNC 40	SNC 7488	TAC 36	
	TNC 44		TAC 40	
	TNC 47		TAC 44	
	TNC 50		TAC 47	
	TNC 53		TAC 50	
<b>DSSB-CC-TB2080 (M12)</b>	TNC 27	SNC 5476	TAC 27	SAC 6682
	TNC 30	SNC 7488	TAC 30	SAC 83103
	TNC 33	SNC 87102	TAC 32	SAC 100114
	TNC 36	SNC 103116	TAC 33	SAC 125160
	TNC 40	SNC 117138	TAC 36	
	TNC 44	SNC 138180	TAC 40	
	TNC 47		TAC 44	
	TNC 50		TAC 47	
	TNC 53		TAC 50	
	TNC 55		TAC 53	
	TNC 60		TAC 55	
	TNC 65		TAC 60	
	TNC 67		TAC 65	
	TNC 70		TAC 70	
	TNC 73		TAC 73	
TNC 77				
<b>DSSB-CC-TB71112 (M12)</b>	TNC 70	SNC 87102	TAC 85	SAC 6882
	TNC 73	SNC 103116	TAC 93	SAC 83103
	TNC 77	SNC 117138	TAC 99	SAC 100114
	TNC 93		TAC 112	SAC 125160
	TNC 99			
	TNC 112			


**Cable Cleats**



**28-49**



**20-80**



**71-112**

[Click Here For Product Flyer](#)

**ALUMINIUM (NON FERROUS TYPE) CABLE CLEATS  
- SINGLE CABLE**

Item Code	Cable Dia. (mm)
DSSB-CC-SAC1827	19-27
DSSB-CC-SAC2838	28-38
DSSB-CC-SAC3953	39-53
DSSB-CC-SAC5468	54-68
DSSB-CC-SAC6682	66-82
DSSB-CC-SAC83103	83-103
DSSB-CC-SAC100114	100-114
DSSB-CC-SAC115135	115-135
DSSB-CC-SAC136170	136-170
DSSB-CC-SAC171190	171-190



**Cable Cleats**



Classification According to : IEC 61914

[Click Here For product Flyer](#)

**ALUMINIUM (NON FERROUS TYPE) TREFOIL CABLE CLEATS FOR THREE CABLE**

Item Code	Cable Dia. (mm)
DSSB-CC-TAC24*	22-24
DSSB-CC-TAC27	25-27
DSSB-CC-TAC30*	28-30
DSSB-CC-TAC32*	31-32
DSSB-CC-TAC34	33-34
DSSB-CC-TAC36	35-36
DSSB-CC-TAC40	37-40
DSSB-CC-TAC44	41-44
DSSB-CC-TAC47	45-47
DSSB-CC-TAC50	48-50
DSSB-CC-TAC53	51-53
DSSB-CC-TAC55	54-55
DSSB-CC-TAC60	56-60
DSSB-CC-TAC63*	61-63
DSSB-CC-TAC65	64-65
DSSB-CC-TAC66*	64-66
DSSB-CC-TAC70	67-70
DSSB-CC-TAC73	71-73
DSSB-CC-TAC77*	74-77
DSSB-CC-TAC 81*	78-81
DSSB-CC-TAC85*	82-85
DSSB-CC-TAC 90*	86-90
DSSB-CC-TAC93	91-93
DSSB-CC-TAC95	93-95
DSSB-CC-TAC96*	94-93
DSSB-CC-TAC99	97-99
DSSB-CC-TAC102*	100-102
DSSB-CC-TAC105*	103-105
DSSB-CC-TAC109*	106-109
DSSB-CC-TAC112	110-112
DSSB-CC-TAC118	113-118



\*' non stock item minimum quantities apply.



Classification According to : IEC 61914

[Click Here For Product Flyer](#)

**Cable Cleats**

## GC CABLE CLEATS - SINGLE POWER CABLE

Item Code	Cable Diameter
DSSB-CC-SPCRG8-21	RG8"
DSSB-CC-SPCRG8-31	RG8"
DSSB-CC-SPC12-21	1/2"
DSSB-CC-SPC12-31	1/2"
DSSB-CC-SPC78-21	7/8"
DSSB-CC-SPC78-31	7/8"
DSSB-CC-SPC158-21	1 5/8"
DSSB-CC-SPC158-31	1 5/8"
DSSB-CC-SPC114-21	1 1/4"
DSSB-CC-SPC114-31	1 1/4"

Note : Other combination can be specially order

\*21 = 2 in 1

\*31 = 3 in 1



## SINGLE HOLE CABLE CLEATS - A

Item Code	Cable Dia. (mm)
DSSB-CC-SHCA105	10.5 - 14.5
DSSB-CC-SHCA122	12.2 - 16.7
DSSB-CC-SHCA146	14.6 - 19.8
DSSB-CC-SHCA180	18.0 - 24.0



## SINGLE HOLE CABLE CLEATS - B

Item Code	Cable Max. Bundle Dia. (mm)
DSSB-CC-SHCB101	10.1
DSSB-CC-SHCB127	12.7
DSSB-CC-SHCB178	17.8
DSSB-CC-SHCB203	20.3
DSSB-CC-SHCB228	22.8
DSSB-CC-SHCB254	25.4



Cable Cleats





## POLE ADAPTER FOR CABLE CLEAT

<b>Item Code</b>
DSSB-CC-PA

**Applications**

With the stainless steel band and two '**Pole Adapters**' will allow you to mount and hold all types of cable clamps (cable cleats) or other product to (*steel or concrete*) poles or other structures which cannot be drilled.

**Features**




Manufactured from Polyamide (PA), Glass Fibre Reinforced.  
 Resistant to oils, UV (ultraviolet), ozone, salt, moisture, acids and even nuclear radiation.  
 UL94 self-extinguishing, Halogen-free.  
 Temperature range from -40°C to 120°C.  
 Coloured black.



Cable Cleats

## STRUT CLAMPS FOR CABLES AND PIPE CONDUITS

CODE	Pipe mm	Size	d mm	T mm	Boilt & Nut
DSSB-HLSC-26	12	½"	21.7	1.4	1.4
DSSB-HLSC-27	19	¾"	27.2	1.4	1.4
DSSB-HLSC-28	25	1"	34	2	2
DSSB-HLSC-29	32	1 ¼"	42.7	2	2
DSSB-HLSC-30	40	1 ½"	48.6	2	2
DSSB-HLSC-31	50	2"	60.5	2.6	2.6
DSSB-HLSC-32	65	2 ½"	76.3	2.6	2.6
DSSB-HLSC-33	75	3"	89.1	2.6	2.6
DSSB-HLSC-34	100	4"	114.3	3	3
DSSB-HLSC-35	125	5"	139.8	3	3
DSSB-HLSC-36	150	6"	165.2	3.4	3.4
DSSB-HLSC-38	200	8"	216.3	3.4	3.4
DSSB-HMPSC-19A	19	-	19.1mm	1.4	1.4
DSSB-HMPSC-125A	25	-	25.4mm	1.4	1.4
DSSB-HMPSC-32A	31	-	31.8mm	2	2
DSSB-HMPSC-40A	39	-	38.1mm	2	2
DSSB-HMPSC-50A	51	-	50.8mm	2	2
DSSB-HMPSC-65A	63	-	63.5mm	2.6	2.6

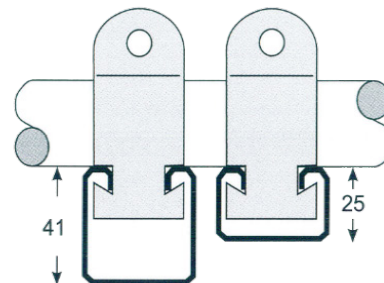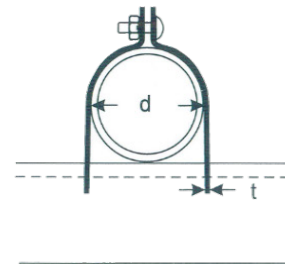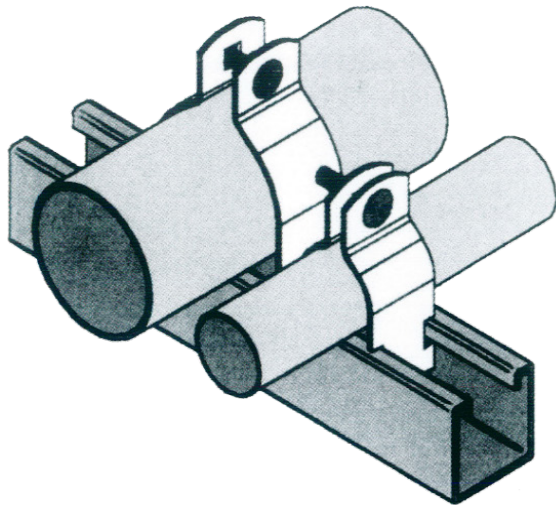

- Quick and easy installation
- Suitable for pipes, conduits and even cables
- HLSC series for pipes and HMPSC series for conduits.
- Fits into both 41mm and 25mm strut channels
- Excellent finishing for indoor and outdoor use

Hot Dipped Galvanized Cable Cleats

## STAINLESS STEEL CLEAT FOR TREFOIL CABLE (SS316)

Item Code	Cable Outer Diameter Range (mm)	Height (mm)	Width (mm)	Fixing Hole (mm)
DSSB-CC-SST206	20-25	65	60	M8
DSSB-CC-SST266	26-32	75	74.9	M8
DSSB-CC-SST336	33-38	99	86.9	M8
DSSB-CC-SST386	38-44	108	102	M8
DSSB-CC-SST456	48-50	112	115	M8
DSSB-CC-SST516	51-55	128	117	M8
DSSB-CC-SST556	55-60	133	132	M10
DSSB-CC-SST606	60-65	145	150	M10
DSSB-CC-SST656	65-68	150	132	M10
DSSB-CC-SST696	69-74	165	175	M10

### Specification:

- Material: Stainless Steel SS316 with folded sides.
- Smooth edges, eliminate the use of lining as it does not cut into cable outer sheath.



## STAINLESS STEEL CLEAT FOR SINGLE CABLE (SS316)

Item Code	Cable Diameter Range (mm)	Fixing Hole (mm)
DSSB-CC-SSC20.0 - 23.06	20.0 - 23.0	M8
DSSB-CC-SSC23.1 - 26.16	23.1 - 26.1	M8
DSSB-CC-SSC26.2 - 29.26	26.2 - 29.2	M8
DSSB-CC-SSC29.3 - 32.26	29.3 - 32.2	M8
DSSB-CC-SSC32.4 - 35.46	32.4 - 35.4	M8
DSSB-CC-SSC35.5 - 38.56	35.5 - 38.5	M8
DSSB-CC-SSC38.6 - 41.66	38.6 - 41.6	M8
DSSB-CC-SSC41.7 - 44.76	41.7 - 44.7	M10
DSSB-CC-SSC44.8 - 47.86	44.8 - 47.8	M10
DSSB-CC-SSC47.9 - 50.96	47.9 - 50.9	M10
DSSB-CC-SSC51.0 - 54.06	51.0 - 54.0	M10
DSSB-CC-SSC54.1 - 57.16	54.1 - 57.1	M10
DSSB-CC-SSC57.2 - 60.26	57.2 - 60.2	M10
DSSB-CC-SSC60.3 - 63.36	60.3 - 63.3	M10
DSSB-CC-SSC63.4 - 66.46	63.4 - 66.4	M12
DSSB-CC-SSC69.5 - 72.56	69.5 - 72.5	M12
DSSB-CC-SSC72.6 - 75.66	72.6 - 75.6	M12
DSSB-CC-SSC75.7 - 78.86	75.7 - 78.8	M12

### Specification:

- Material: Stainless Steel SS316 with folded sides.
- Smooth edges, eliminate the use of lining as it does not cut into cable outer sheath.



Stainless Steel Cable Cleats

## STAINLESS STEEL CLEAT FOR TREFOIL CABLE (SS304)

Item Code	Cable Outer Diameter Range (mm)	Height (mm)	Width (mm)	Fixing Hole (mm)
DSSB-CC-SST204	20-25	65	60	M8
DSSB-CC-SST264	26-32	75	74.9	M8
DSSB-CC-SST334	33-38	99	86.9	M8
DSSB-CC-SST384	38-44	108	102	M8
DSSB-CC-SST454	48-50	112	115	M8
DSSB-CC-SST514	51-55	128	117	M8
DSSB-CC-SST554	55-60	133	132	M10
DSSB-CC-SST604	60-65	145	150	M10
DSSB-CC-SST654	65-68	150	132	M10
DSSB-CC-SST694	69-74	165	175	M10

### Specification:

- Material: Stainless Steel SS304 with folded sides.
- Smooth edges, eliminate the use of lining as it does not cut into cable outer sheath. (The usage of rubber lining is



## STAINLESS STEEL CLEAT FOR SINGLE CABLE (SS304)

Item Code	Cable Diameter Range (mm)	Fixing Hole (mm)
DSSB-CC-SSCDSSB-CC-SSC20.0 - 23.04	20.0 - 23.0	M8
DSSB-CC-SSCDSSB-CC-SSC23.1 - 26.14	23.1 - 26.1	M8
DSSB-CC-SSCDSSB-CC-SSC26.2 - 29.24	26.2 - 29.2	M8
DSSB-CC-SSCDSSB-CC-SSC29.3 - 32.24	29.3 - 32.2	M8
DSSB-CC-SSCDSSB-CC-SSC32.4 - 35.44	32.4 - 35.4	M8
DSSB-CC-SSCDSSB-CC-SSC35.5 - 38.54	35.5 - 38.5	M8
DSSB-CC-SSCDSSB-CC-SSC38.6 - 41.64	38.6 - 41.6	M8
DSSB-CC-SSCDSSB-CC-SSC41.7 - 44.74	41.7 - 44.7	M10
DSSB-CC-SSCDSSB-CC-SSC44.8 - 47.84	44.8 - 47.8	M10
DSSB-CC-SSCDSSB-CC-SSC47.9 - 50.94	47.9 - 50.9	M10
DSSB-CC-SSCDSSB-CC-SSC51.0 - 54.04	51.0 - 54.0	M10
DSSB-CC-SSCDSSB-CC-SSC54.1 - 57.14	54.1 - 57.1	M10
DSSB-CC-SSCDSSB-CC-SSC57.2 - 60.24	57.2 - 60.2	M10
DSSB-CC-SSCDSSB-CC-SSC60.3 - 63.34	60.3 - 63.3	M10
DSSB-CC-SSCDSSB-CC-SSC63.4 - 66.44	63.4 - 66.4	M12
DSSB-CC-SSCDSSB-CC-SSC69.5 - 72.54	69.5 - 72.5	M12
DSSB-CC-SSCDSSB-CC-SSC72.6 - 75.64	72.6 - 75.6	M12
DSSB-CC-SSCDSSB-CC-SSC75.7 - 78.84	75.7 - 78.8	M12

### Specification:

- Material: Stainless Steel SS304 with folded sides.
- Smooth edges, eliminate the use of lining as it does not cut into cable outer sheath.
- Non Magnetic



Stainless Steel Cable Cleats

## P-CLIP / STAINLESS STEEL CLAMP C/W LINER


Code No.	Clamping Size (E)		Thickness (C)	Dimension		Pieces Per Bag
	Inch	mm		Hole (D)	Width (B)	
			mm	mm		
DSSB-FPMC3/16"	3/16"	4.76	0.8	6.8	12.7	100
DSSB-FPMC1/4"	1/4"	6	0.8	6.8	12.7	100
DSSB-FPMC3/8"	3/8"	10	0.8	6.8	12.7	100
DSSB-FPMC1/2"	1/2"	13	0.8	6.8	12.7	100
DSSB-FPMC5/8"	5/8"	16	0.8	6.8	12.7	100
DSSB-FPMC3/4"	3/4"	19	0.8	6.8	12.7	100
DSSB-FPMC7/8"	7/8"	22	0.8	6.8	12.7	100
DSSB-FPMC1"	1"	25	0.8	6.8	12.7	100
DSSB-FPMC1-1/8"	1-1/8"	28	0.8	6.8	12.7	100
DSSB-FPMC1-1/4"	1-1/4"	32	0.8	6.8	12.7	100
DSSB-FPMC1-3/8"	1-3/8"	35	0.8	6.8	12.7	100
DSSB-FPMC1-1/2"	1-1/2"	38	0.8	6.8	12.7	100
DSSB-FPMC1-5/8"	1-5/8"	41	0.8	6.8	12.7	100
DSSB-FPMC1-3/4"	1-3/4"	44	0.8	6.8	12.7	100
DSSB-FPMC1-7/8"	1-7/8"	48	0.8	6.8	12.7	100
DSSB-FPMC2"	2"	50	1.0	6.8	12.7	10
DSSB-FPMC2-1/8"	2-1/8"	54	1.0	6.8	12.7	10
DSSB-FPMC2-1/4"	2-1/4"	57	1.0	6.8	12.7	10
DSSB-FPMC2-3/8"	2-3/8"	60	1.0	6.8	12.7	10
DSSB-FPMC2-1/2"	2-1/2"	63	1.0	6.8	12.7	10
DSSB-FPMC3"	3"	75	1.0	6.8	12.7	10

### Specification:

Material: Steel or Stainless Steel AISI 304  
 Coated: Fully PVC  
 Operating Temperature: -40°C to 120°C

### Recommended Application

Fastening/binding for indoor & outdoor cables.  
 Used for vibration damping and sound insulation.  
 Clip fits tight on object.

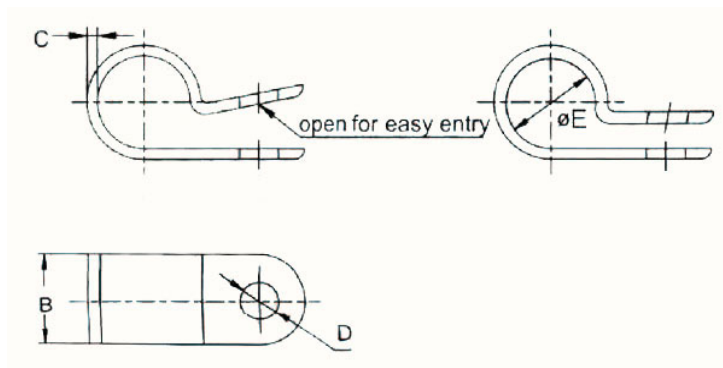

[Click Here For Product Flyer](#)

Stainless Steel Cable Clips

**P-CLIP / STAINLESS STEEL CLAMP C/W LSOH RUBBER LINER**


Code No.	Clamping Size (E)		Thickness (C)	Dimension		Pieces Per Bag
	Inch	mm		Hole (D)	Width (B)	
			mm	mm		
DSSB-RMC3/16"	3/16"	4.76	0.8	6.8	12.7	100
DSSB-RMC1/4"	1/4"	6	0.8	6.8	12.7	100
DSSB-RMC3/8"	3/8"	10	0.8	6.8	12.7	100
DSSB-RMC1/2"	1/2"	13	0.8	6.8	12.7	100
DSSB-RMC5/8"	5/8"	16	0.8	6.8	12.7	100
DSSB-RMC3/4"	3/4"	19	0.8	6.8	12.7	100
DSSB-RMC7/8"	7/8"	22	0.8	6.8	12.7	100
DSSB-RMC1"	1"	25	0.8	6.8	12.7	100
DSSB-RMC1-1/8"	1-1/8"	28	0.8	6.8	12.7	100
DSSB-RMC1-1/4"	1-1/4"	32	0.8	6.8	12.7	100
DSSB-RMC1-3/8"	1-3/8"	35	0.8	6.8	12.7	100
DSSB-RMC1-1/2"	1-1/2"	38	0.8	6.8	12.7	100
DSSB-RMC1-5/8"	1-5/8"	41	0.8	6.8	12.7	100
DSSB-RMC1-3/4"	1-3/4"	44	0.8	6.8	12.7	100
DSSB-RMC1-7/8"	1-7/8"	48	0.8	6.8	12.7	100
DSSB-RMC2"	2"	50	1.0	6.8	12.7	10
DSSB-RMC2-1/8"	2-1/8"	54	1.0	6.8	12.7	10
DSSB-RMC2-1/4"	2-1/4"	57	1.0	6.8	12.7	10
DSSB-RMC2-3/8"	2-3/8"	60	1.0	6.8	12.7	10
DSSB-RMC2-1/2"	2-1/2"	63	1.0	6.8	12.7	10
DSSB-RMC3"	3"	75	1.0	6.8	12.7	10

**Specification:**

Material: Steel or Stainless Steel AISI 304  
 Coated: Semi Rubber  
 Operating Temperature: -40°c to 120°c

**Recommended Application**

Fastening/binding for indoor & outdoor cables.  
 Used for vibration damping and sound insulation.  
 Clip fits tight on object.

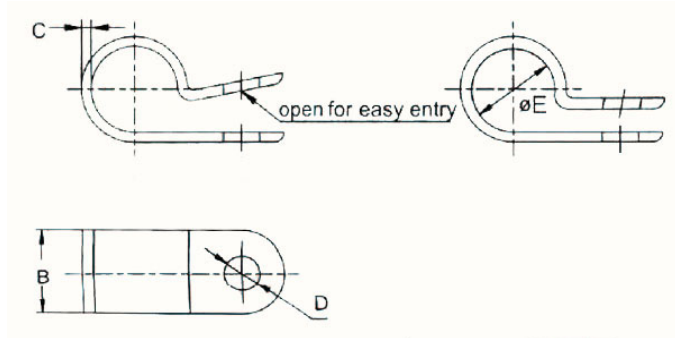


[Click Here For Product Flyer](#)

**Stainless Steel Cable Clips**


## 275kV HIGH-VOLTAGE SINGLE CABLE CLEAT TYPE A

Item No.	Cable Dia. (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Stud (mm)
DSSB-CC-SAC-115135	115 - 135	180	220	73	2-M12
DSSB-CC-SAC-136170	136 - 170	208	249	73	2-M12

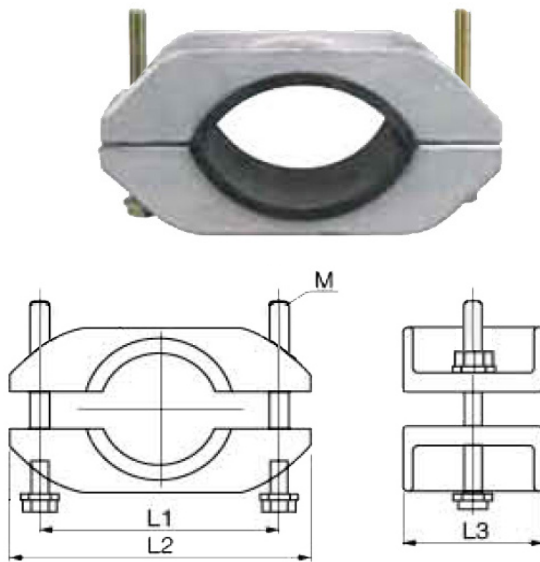

## 500kV EXTRA HIGH-VOLTAGE SINGLE CABLE CLEAT TYPE C

Item No.	Cable Dia. (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Bolt (mm)
DSSB-CC-SAC-171190	171 - 190	232	275	115	2-M16

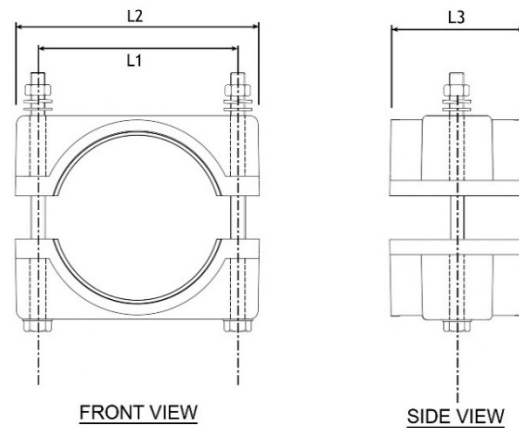

ALUMINIUM CABLE CLEATS

# Delta Sama Jaya Sdn.Bhd.



**DELTA SAMA JAYA**  
[www.substation.com.my](http://www.substation.com.my)

We are constantly reviewing and updating our products,  
for the latest information please call us on (+603) 9281 3778  
or visit our website at: [www.substation.com.my](http://www.substation.com.my)