

SWITCHYARD LIGHTING & FEEDER PILLAR



Tab 16


FEEDER PILLAR



TNB'S SUBSTATION / STREET LIGHTING FEEDER PILLAR (TYPICAL TYPE)



FRONT VIEW

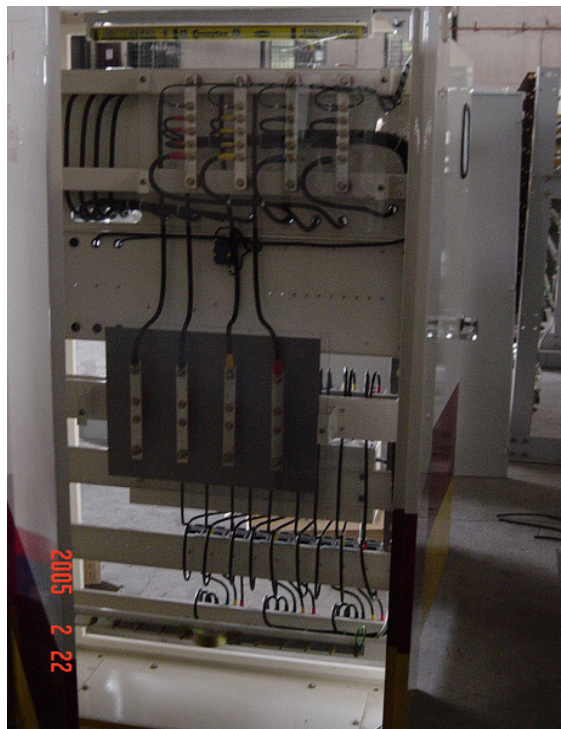

BACK VIEW

JUNCTION BOX - IP65 (IEC529)



VERTICAL TYPE

Item Code	Dimension (mm) H x W x D
DSSB-L-JB252010	250 x 200 x 100
DSSB-L-JB252015	250 x 200 x 150
DSSB-L-JB302515	300 x 250 x 150
DSSB-L-JB302520	300 x 250 x 200
DSSB-L-JB303015	300 x 300 x 150
DSSB-L-JB303020	300 x 300 x 200
DSSB-L-JB403015	400 x 300 x 150
DSSB-L-JB403020	400 x 300 x 200
DSSB-L-JB404020	400 x 400 x 200
DSSB-L-JB504015	500 x 400 x 150
DSSB-L-JB504020	500 x 400 x 200
DSSB-L-JB504025	500 x 400 x 250
DSSB-L-JB504030	500 x 400 x 300
DSSB-L-JB505020	500 x 500 x 200
DSSB-L-JB505025	500 x 500 x 250
DSSB-L-JB604015	600 x 400 x 150
DSSB-L-JB604020	600 x 400 x 200
DSSB-L-JB604025	600 x 400 x 250
DSSB-L-JB605020	600 x 500 x 200
DSSB-L-JB605025	600 x 500 x 250
DSSB-L-JB606020	600 x 600 x 200
DSSB-L-JB606025	600 x 600 x 250
DSSB-L-JB606030	600 x 600 x 300
DSSB-L-JB705020	700 x 500 x 200
DSSB-L-JB705025	700 x 500 x 250
DSSB-L-JB806020	800 x 600 x 200
DSSB-L-JB806025	800 x 600 x 250
DSSB-L-JB806030	800 x 600 x 300
DSSB-L-JB808025	800 x 800 x 250
DSSB-L-JB1006030	1000 x 600 x 300
DSSB-L-JB1008030	1000 x 800 x 300
DSSB-L-JB1208030	1200 x 800 x 300

HORIZONTAL TYPE

Item Code	Dimension (mm) H x W x D
DSSB-L-JB302515H	250 x 300 x 150
DSSB-L-JB302520H	250 x 300 x 200
DSSB-L-JB403015H	300 x 400 x 150
DSSB-L-JB403020H	300 x 400 x 200
DSSB-L-JB504015H	400 x 500 x 150
DSSB-L-JB504020H	400 x 500 x 200

TWO-DOOR TYPE

Item Code	Dimension (mm) H x W x D
DSSB-L-JB1008030H	800 x 1000 x 30
DSSB-L-JB10010030	1000 x 1000 x 30
DSSB-L-JB12010030	1200 x 1000 x 30

- * A continuous seal of polyurethane gasket at door provide high IP protection.
- * Surface finished with polyester powder coating RAL7032 texture, CVS beige colour.
- * Galvanised mounting plate and wall mounting bracket.
- * 4 welded studs for fixing mounting plate.
- * Conceal hinges provide 130° door opening.
- * Earthing facilities on door, body and mounting plate.
- * Double folded gutter at door frame increases rigidity and prevents water from entering while door is opened



SIRIM
Certified to: MS IEC 60529: 2005
Certification No.: LC020801



CERT NO. KLR 0403479


SUBSTATION



132/33/11kV Pasir Panjang Substation




275kV Tg. Bin Substation




Website: www.substation.com.my

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.




199901025376 (500276-W)

Website: www.substation.com.my




This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



199901025376 (500276-W)

Tel: +603-92824007, +603-92813778 Fax: +603-92870705

Website: www.substation.com.my



CERTIFIED TO ISO 9001:2015
CERT. NO. : EMS 00766

[illegible]

Delta Sama Jaya Sdn.Bhd.



DELTA SAMA JAYA
www.substation.com.my

We are constantly reviewing and updating our products,
for the latest information please call us on (+603) 9281 3778
or visit our website at: www.substation.com.my