


# CABLE TIE



Tab 8

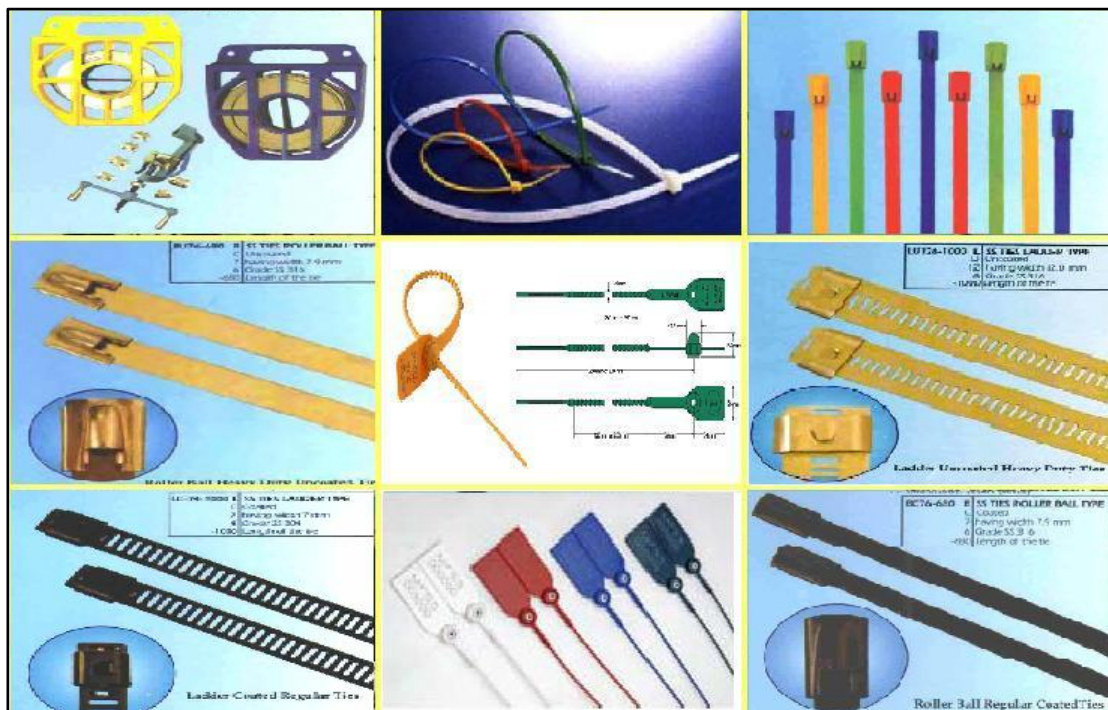

*Redefining Supply*  
An ISO 9001 &  
14001 Company

# NYLON CABLE TIES

## CABLE TIES - NYLON

### Non-Releasable Cable Ties

#### Feature:

- ~ Cable tie is an economical and versatile method of Cable/Wire bunching system
- ~ Cable tie has self locking and one piece construction which ensure the fast and easy installation
- ~ Non Releasable Cable tie, once locked can not be opened or reused

**Cable tie Material:** Natural Nylon 66

**Application:** for Indoor Wire/ cable bunching, Packing bags, etc.

**Colour:** Black/ Natural (White)

**Operating Temperature:** - 35°C to 85°C

**Flamability Rating:** UL 94V-2

**Resistance Capability:** Heat Resisting, Acid & Erosion Control, Insulate Well & Not Easily Wear

Item Code	Nominal Overall Length (L)		Approx. Width (W) (mm)	Bundle Diameter (E) (mm)	Min. Loop Tensile
	Inch	mm			
<b>MINIATURE</b>					
DSSB-TIE-NY100-2.5	4"	100	2.5	2 - 22mm	8kg
DSSB-TIE-NY150-2.5	6"	150	2.5	2 - 35mm	8kg
<b>INTERMEDIATE</b>					
DSSB-TIE-NY100-3.6	4"	100	3.6	3 - 22mm	18kg
DSSB-TIE-NY150-3.6	6"	150	3.6	3 - 35mm	18kg
DSSB-TIE-NY200-3.6	8" (Small)	200	3.6	3 - 50mm	18kg
DSSB-TIE-NY250-3.6	10" (Small)	250	3.6	3 - 65mm	18kg
<b>STANDARD</b>					
DSSB-TIE-NY200-4.8	8" (Small)	200	4.8	3 - 50mm	22kg
DSSB-TIE-NY250-4.8	10" (Small)	250	4.8	3 - 65mm	22kg
DSSB-TIE-NY300-4.8	12" (Small)	300	4.8	3 - 82mm	22kg
DSSB-TIE-NY350-4.8	14" (Small)	350	4.8	3 - 90mm	22kg
DSSB-TIE-NY400-4.8	16" (Small)	400	4.8	3 - 105mm	22kg



Material	Flamability Rating	Recommended Working Temp	UV Resistance	Colour
Nylon 66	94V - 2	-35°C to 85°C	Poor	Natural
Weather Resistance Nylon 66	94V - 3	-35°C to 85°C	Good	Black



## CABLE TIES - NYLON

# Cable Tie



Item Code	Nominal Overall Length (L)		Approx. Width (W) (mm)	Bundle Diameter (E) (mm)	Min. Loop Tensile
	Inch	mm			
<b>HEAVY DUTY</b>					
DSSB-TIE-NY200-7.0	8" (L)	200	7.0	4 - 50mm	38kg
DSSB-TIE-NY250-7.6	10" (XL)	250	7.6	4 - 63mm	55kg
DSSB-TIE-NY300-7.6	12" (Big)	300	7.6	4 - 82mm	55kg
DSSB-TIE-NY350-7.6	14" (Big)	350	7.6	4 - 90mm	55kg
DSSB-TIE-NY400-7.6	16" (Big)	400	7.6	4 - 105mm	55kg
DSSB-TIE-NY450-7.6	18"	450	7.6	4 - 118mm	55kg
DSSB-TIE-NY500-7.6	20"	500	7.6	4 - 150mm	55kg
<b>INTERMEDIATE HEAVY DUTY</b>					
DSSB-TIE-NY400-9.0	16" (XL)	400	9.0	8 - 105mm	80kg
DSSB-TIE-NY450-9.0	18"	450	9.0	8 - 118mm	80kg
DSSB-TIE-NY500-9.0	20"	500	9.0	8 - 147mm	80kg
DSSB-TIE-NY550-9.0	22"	550	9.0	8 - 160mm	80kg
DSSB-TIE-NY600-9.0	24"	600	9.0	8 - 170mm	80kg
DSSB-TIE-NY650-9.0	26"	650	9.0	8 - 190mm	80kg
DSSB-TIE-NY700-9.0	28"	700	9.0	10 - 205mm	80kg
DSSB-TIE-NY760-9.0	30"	760	9.0	10 - 225mm	80kg
DSSB-TIE-NY920-9.0	36 1/2"	920	9.0	10 - 265mm	80kg
DSSB-TIE-NY1020-9.0	40 1/6"	1020	9.0	10 - 295mm	80kg
DSSB-TIE-NY1150-9.0	46"	1150	9.0	10 - 310mm	80kg
DSSB-TIE-NY1220-9.0	48"	1220	9.0	10 - 340mm	80kg
DSSB-TIE-NY1350-9.0	54"	1350	9.0	10 - 380mm	80kg
<b>EXTRA HEAVY DUTY</b>					
DSSB-TIE-NY300-12.7	12	300	12.7	12 - 82mm	114kg
DSSB-TIE-NY400-12.7	16	400	12.7	12 - 105mm	114kg
DSSB-TIE-NY540-12.7	22	540	12.7	14 - 155mm	114kg
DSSB-TIE-NY650-12.4	26	650	12.4	14 - 190mm	114kg
DSSB-TIE-NY750-12.0	30	750	12.0	14 - 220mm	114kg
DSSB-TIE-NY1000-12.4	40	1000	12.4	14 - 305mm	114kg





# COLOUR CABLE TIES - NYLON

**Cable tie Material:** Natural Nylon 66  
**Application:** for Indoor Wire/ cable bunching, Packing bags, etc.  
**Operating Temperature:** - 35°C to 85°C  
**Flamability Rating:** UL 94V-2  
**Resistance Capability:** Heat Resisting, Acid & Erosion Control, Insulate Well & Not Easily Wear  
**Colour:** Blue, Green Orange, Red, Yellow, etc.  
 Other colour available upon request.

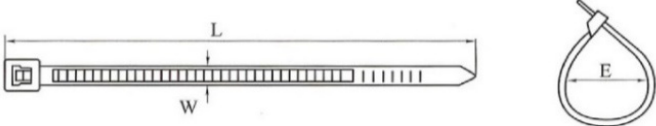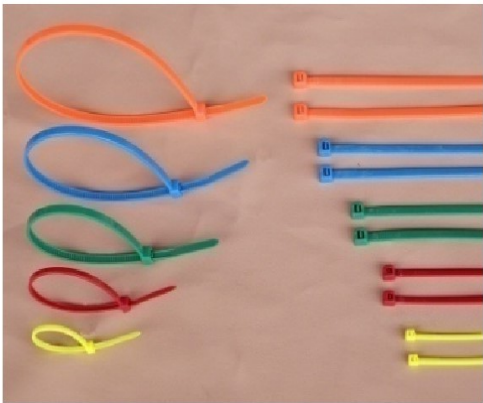

Item Code	Nominal Overall Length (L)		Approx. Width (W) (mm)	Bundle Diameter (E) (mm)	Colour
	Inch	mm			
<b>MINIATURE</b>					
DSSB-TIE-NYB100-2.5	4"	100	2.5	2 - 22mm	Blue
DSSB-TIE-NYG100-2.5	4"	100	2.5	2 - 22mm	Green
DSSB-TIE-NYO100-2.5	4"	100	2.5	2 - 22mm	Orange
DSSB-TIE-NYR100-2.5	4"	100	2.5	2 - 22mm	Red
DSSB-TIE-NYY100-2.5	4"	100	2.5	2 - 22mm	Yellow
<b>INTERMEDIATE</b>					
DSSB-TIE-NYB150-3.6	6"	150	3.6	3 - 35mm	Blue
DSSB-TIE-NYG150-3.6	6"	150	3.6	3 - 35mm	Green
DSSB-TIE-NYO150-3.6	6"	150	3.6	3 - 35mm	Orange
DSSB-TIE-NYR150-3.6	6"	150	3.6	3 - 35mm	Red
DSSB-TIE-NYY150-3.6	6"	150	3.6	3 - 35mm	Yellow
<b>STANDARD</b>					
DSSB-TIE-NYB200-4.8	8"	200	4.8	3 - 50mm	Blue
DSSB-TIE-NYG200-4.8	8"	200	4.8	3 - 50mm	Green
DSSB-TIE-NYO200-4.8	8"	200	4.8	3 - 50mm	Orange
DSSB-TIE-NYR200-4.8	8"	200	4.8	3 - 50mm	Red
DSSB-TIE-NYY200-4.8	8"	200	4.8	3 - 50mm	Yellow
DSSB-TIE-NYB250-4.8	10"	250	4.8	3 - 65mm	Blue
DSSB-TIE-NYG250-4.8	10"	250	4.8	3 - 65mm	Green
DSSB-TIE-NYO250-4.8	10"	250	4.8	3 - 65mm	Orange
DSSB-TIE-NYR250-4.8	10"	250	4.8	3 - 65mm	Red
DSSB-TIE-NYY250-4.8	10"	250	4.8	3 - 65mm	Yellow
DSSB-TIE-NYB300-4.8	12" (Small)	300	4.8	3 - 82mm	Blue
DSSB-TIE-NYG300-4.8	12" (Small)	300	4.8	3 - 82mm	Green
DSSB-TIE-NYO300-4.8	12" (Small)	300	4.8	3 - 82mm	Orange
DSSB-TIE-NYR300-4.8	12" (Small)	300	4.8	3 - 82mm	Red
DSSB-TIE-NYY300-4.8	12" (Small)	300	4.8	3 - 82mm	Yellow

Cable Tie



# CABLE TIES FOR ABC

Item Code	Dimensions	
	A	B
DSSB-ABC-TIE360152	15mm	360mm

**Technical Specification : DSSB-ABC-TIE360152**

**Material :** Weather and UV-Resistant Nylon 6.6

**Color :** Black

**Length :** 360mm

**Width :** 15mm

**Locking Type :** Locking Non-releasable


**Minimum Loop Strength :** 300N

**Minimum Tensile Strength :** 300 N

**Resistance to chemical agents :** Good resistance to bases, oils, grease,

**Tests**

The Cable Tie is extensively tested according to Tensile Strength Test and Loop Tensile Test.

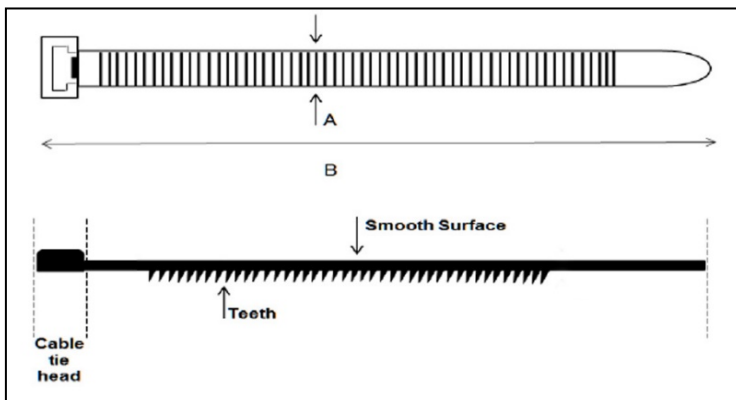

Cable Tie



*Redefining Supply*  
An ISO 9001 &  
14001 Company


# STAINLESS STEEL CABLE TIES

## STAINLESS STEEL CABLE TIES - BALL LOCK TYPE (AISI. 304 & 316)


**Cable Tie Material:** Stainless Steel AISI 304 & 316.  
AISI 201 available upon request.

**Operating Temperature:** - 80°C to 538°C

**Application:** For on board ship & offshore units  
Fastening/ Binding for indoor or outdoor use

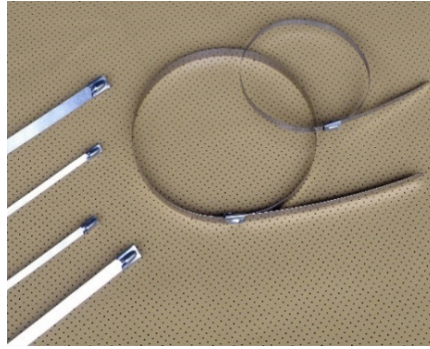

Item Code	Nominal Overall Length (L)		Approx. Width (W) x Thickness (mm)	Max Bundle Diameter (E) (mm)	Tensile Strength
	Inch	mm			
<b>STANDARD</b>					
DSSB-TIE-SS/100-4.6	4"	100	4.6 x 0.26	23	100kg
DSSB-TIE-SS/150-4.6	6"	150	4.6 x 0.26	35	100kg
DSSB-TIE-SS/200-4.6	8"	200	4.6 x 0.26	50	100kg
DSSB-TIE-SS/250-4.6	10"	250	4.6 x 0.26	68	100kg
DSSB-TIE-SS/300-4.6	12"	300	4.6 x 0.26	80	100kg
DSSB-TIE-SS/360-4.6	14.5"	360	4.6 x 0.26	95	100kg
DSSB-TIE-SS/400-4.6	16"	400	4.6 x 0.26	102	100kg
DSSB-TIE-SS/450-4.6	18"	450	4.6 x 0.26	120	100kg
DSSB-TIE-SS/520-4.6	20.5"	520	4.6 x 0.26	145	100kg
DSSB-TIE-SS/600-4.6	24"	600	4.6 x 0.26	160	100kg
<b>HEAVY DUTY</b>					
DSSB-TIE-SS/150-7.9	6"	150	7.9 x 0.26	37	220kg
DSSB-TIE-SS/200-7.9	8"	200	7.9 x 0.26	50	220kg
DSSB-TIE-SS/250-7.9	10"	250	7.9 x 0.26	63	220kg
DSSB-TIE-SS/300-7.9	12"	300	7.9 x 0.26	76	220kg
DSSB-TIE-SS/360-7.9	14.5"	360	7.9 x 0.26	90	220kg
DSSB-TIE-SS/400-7.9	16"	400	7.9 x 0.26	102	220kg
DSSB-TIE-SS/450-7.9	18"	450	7.9 x 0.26	120	220kg
DSSB-TIE-SS/520-7.9	20.5"	520	7.9 x 0.26	145	220kg
DSSB-TIE-SS/600-7.9	24"	600	7.9 x 0.26	160	220kg
DSSB-TIE-SS/680-7.9	27"	680	7.9 x 0.26	180	220kg
DSSB-TIE-SS/750-7.9	30"	750	7.9 x 0.26	200	220kg
DSSB-TIE-SS/840-7.9	33.5"	840	7.9 x 0.26	250	220kg
DSSB-TIE-SS/1050-7.9	42"	1050	7.9 x 0.26	285	220kg

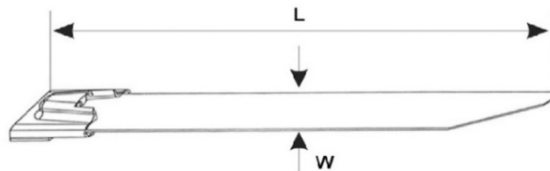


Stainless Steel Cable Tie

## STAINLESS STEEL CABLE TIES - BALL LOCK TYPE (AISI. 304 & 316)


**Cable Tie Material:** Stainless Steel AISI 304 & 316.  
AISI 201 available upon request.

**Operating Temperature:** - 80°C to 538°C

**Application:** For on board ship & offshore units  
Fastening/ Binding for indoor or outdoor use

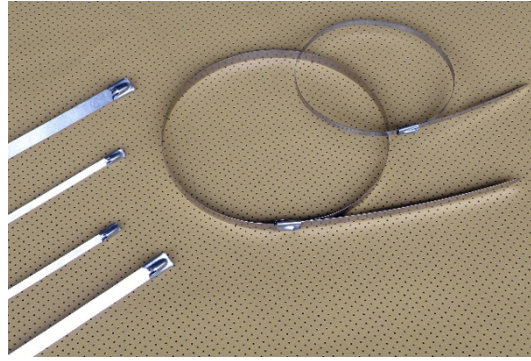

Item Code	Nominal Overall Length (L)		Approx. Width (W) x Thickness (mm)	Max Bundle Diameter (E) (mm)	Tensile Strength
	Inch	mm			
<b>EXTRA HEAVY DUTY</b>					
DSSB-TIE-SS/200-12	8"	200	12 x 0.45	50	315kg
DSSB-TIE-SS/250-12	10"	250	12 x 0.45	63	315kg
DSSB-TIE-SS/300-12	12"	300	12 x 0.45	76	315kg
DSSB-TIE-SS/360-12	14.5"	360	12 x 0.45	90	315kg
DSSB-TIE-SS/400-12	16"	400	12 x 0.45	102	315kg
DSSB-TIE-SS/450-12	18"	450	12 x 0.45	120	315kg
DSSB-TIE-SS/520-12	20.5"	520	12 x 0.45	145	315kg
DSSB-TIE-SS/600-12	24"	600	12 x 0.45	160	315kg
DSSB-TIE-SS/680-12	27"	680	12 x 0.45	180	315kg
DSSB-TIE-SS/750-12	30"	750	12 x 0.45	200	315kg
DSSB-TIE-SS/840-12	33.5"	840	12 x 0.45	250	315kg
DSSB-TIE-SS/1050-12	42"	1050	12 x 0.45	285	315kg
<b>SUPER HEAVY DUTY</b>					
DSSB-TIE-SS/250-15	10"	250	15 x 0.45	63	415kg
DSSB-TIE-SS/300-15	12"	300	15 x 0.45	76	415kg
DSSB-TIE-SS/360-15	14.5"	360	15 x 0.45	90	415kg
DSSB-TIE-SS/400-15	16"	400	15 x 0.45	102	415kg
DSSB-TIE-SS/450-15	18"	450	15 x 0.45	120	415kg
DSSB-TIE-SS/520-15	20.5"	520	15 x 0.45	145	415kg
DSSB-TIE-SS/600-15	24"	600	15 x 0.45	160	415kg
DSSB-TIE-SS/680-15	27"	680	15 x 0.45	180	415kg
DSSB-TIE-SS/750-15	30"	750	15 x 0.45	200	415kg
DSSB-TIE-SS/840-15	33.5"	840	15 x 0.45	250	415kg
DSSB-TIE-SS/1050-15	42"	1050	15 x 0.45	285	415kg

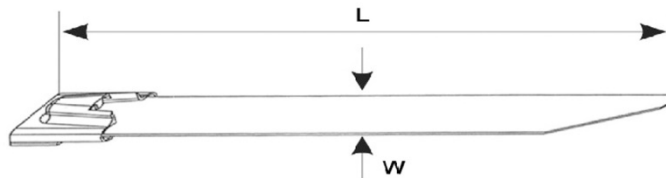

Stainless Steel Cable Tie



## FULLY COATED STAINLESS STEEL CABLE TIES BALL LOCK TYPE


**Cable Tie Material:** Stainless Steel AISI 304 & 316.  
AISI 201 available upon request.

**Operating Temperature:** - 80°C to 150°C

**Application:** For on board ship & offshore units  
Fastening/ Binding for indoor or outdoor use



Item Code	Nominal Overall Length (L)		Approx. Width (W) x Thickness (mm)	Max Bundle Diameter (E) (mm)	Tensile Strength
	Inch	mm			
<b>STANDARD</b>					
DSSB-TIE-SS-C/100-4.6	4"	100	4.6 x 0.35	23	70kg
DSSB-TIE-SS-C/150-4.6	6"	150	4.6 x 0.35	35	70kg
DSSB-TIE-SS-C/200-4.6	8"	200	4.6 x 0.35	50	70kg
DSSB-TIE-SS-C/250-4.6	10"	250	4.6 x 0.35	68	70kg
DSSB-TIE-SS-C/300-4.6	12"	300	4.6 x 0.35	80	70kg
DSSB-TIE-SS-C/360-4.6	14.5"	360	4.6 x 0.35	95	70kg
DSSB-TIE-SS-C/400-4.6	16"	400	4.6 x 0.35	102	70kg
DSSB-TIE-SS-C/450-4.6	18"	450	4.6 x 0.35	120	70kg
DSSB-TIE-SS-C/520-4.6	20.5"	520	4.6 x 0.35	145	70kg
DSSB-TIE-SS-C/600-4.6	24"	600	4.6 x 0.35	160	70kg
<b>HEAVY DUTY</b>					
DSSB-TIE-SS-C/150-7.9	6"	150	7.9 x 0.35	37	110kg
DSSB-TIE-SS-C/200-7.9	8"	200	7.9 x 0.35	50	110kg
DSSB-TIE-SS-C/250-7.9	10"	250	7.9 x 0.35	63	110kg
DSSB-TIE-SS-C/300-7.9	12"	300	7.9 x 0.35	76	110kg
DSSB-TIE-SS-C/360-7.9	14.5"	360	7.9 x 0.35	90	110kg
DSSB-TIE-SS-C/400-7.9	16"	400	7.9 x 0.35	102	110kg
DSSB-TIE-SS-C/450-7.9	18"	450	7.9 x 0.35	120	110kg
DSSB-TIE-SS-C/520-7.9	20.5"	520	7.9 x 0.35	145	110kg
DSSB-TIE-SS-C/600-7.9	24"	600	7.9 x 0.35	160	110kg
DSSB-TIE-SS-C/680-7.9	27"	680	7.9 x 0.35	180	110kg
DSSB-TIE-SS-C/750-7.9	30"	750	7.9 x 0.35	200	110kg
DSSB-TIE-SS-C/840-7.9	33.5"	840	7.9 x 0.35	250	110kg
DSSB-TIE-SS-C/1050-7.9	42"	1050	7.9 x 0.35	285	110kg

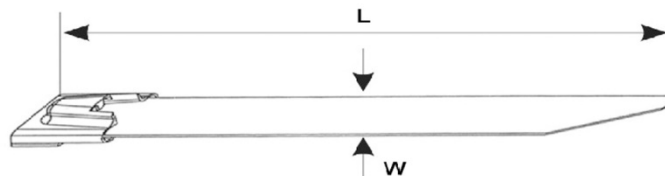

Stainless Steel Cable Tie

## FULLY COATED STAINLESS STEEL CABLE TIES BALL LOCK TYPE


**Cable Tie Material:** Stainless Steel AISI 304 & 316.  
AISI 201 available upon request.

**Operating Temperature:** - 80°C to 150°C

**Application:** For on board ship & offshore units  
Fastening/ Binding for indoor or outdoor use



Item Code	Nominal Overall Length (L)		Approx. Width (W) x Thickness (mm)	Max Bundle Diameter (E) (mm)	Tensile Strength
	Inch	mm			
<b>EXTRA HEAVY DUTY</b>					
DSSB-TIE-SS-C/200-12	8"	200	12 x 0.35	50	200kg
DSSB-TIE-SS-C/250-12	10"	250	12 x 0.35	63	200kg
DSSB-TIE-SS-C/300-12	12"	300	12 x 0.35	76	200kg
DSSB-TIE-SS-C/360-12	14.5"	360	12 x 0.35	90	200kg
DSSB-TIE-SS-C/400-12	16"	400	12 x 0.35	102	200kg
DSSB-TIE-SS-C/450-12	18"	450	12 x 0.35	120	200kg
DSSB-TIE-SS-C/520-12	20.5"	520	12 x 0.35	145	200kg
DSSB-TIE-SS-C/600-12	24"	600	12 x 0.35	160	200kg
DSSB-TIE-SS-C/680-12	27"	680	12 x 0.35	180	200kg
DSSB-TIE-SS-C/750-12	30"	750	12 x 0.35	200	200kg
DSSB-TIE-SS-C/840-12	33.5"	840	12 x 0.35	250	200kg
DSSB-TIE-SS-C/1050-12	42"	1050	12 x 0.35	285	200kg
<b>SUPER HEAVY DUTY</b>					
DSSB-TIE-SS-C/250-15	10"	250	15 x 0.35	63	300kg
DSSB-TIE-SS-C/300-15	12"	300	15 x 0.35	76	300kg
DSSB-TIE-SS-C/360-15	14.5"	360	15 x 0.35	90	300kg
DSSB-TIE-SS-C/400-15	16"	400	15 x 0.35	102	300kg
DSSB-TIE-SS-C/450-15	18"	450	15 x 0.35	120	300kg
DSSB-TIE-SS-C/520-15	20.5"	520	15 x 0.35	145	300kg
DSSB-TIE-SS-C/600-15	24"	600	15 x 0.35	160	300kg
DSSB-TIE-SS-C/680-15	27"	680	15 x 0.35	180	300kg
DSSB-TIE-SS-C/750-15	30"	750	15 x 0.35	200	300kg
DSSB-TIE-SS-C/840-15	33.5"	840	15 x 0.35	250	300kg
DSSB-TIE-SS-C/1050-15	42"	1050	15 x 0.35	285	300kg

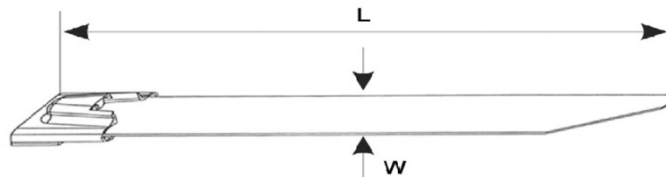

Stainless Steel Cable Tie



## COATED STAINLESS STEEL CABLE TIES L-TYPE

**Cable Tie Material:** Stainless Steel AISI 304 & 316.  
AISI 201 available upon request.

**Operating Temperature:** - 80°C to 538°C

**Application:** For on board ship & offshore units  
Fastening/ Binding for indoor or  
outdoor use



Item Code	Nominal Overall Length (L)		Approx. Width (W) x Thickness (mm)	Max Bundle Diameter (E) (mm)	Tensile Strength
	Inch	mm			
DSSB-CT-10PT-300	12"	300	10 X 0.4	102	120
DSSB-CT-10PT-400	16"	400	10 X 0.4	154	120
DSSB-CT-10PT-600	24"	600	10 X 0.4	193	120
DSSB-CT-10PT-800	32"	800	10 X 0.4	266	120
DSSB-CT-10PT-1200	48"	1200	10 X 0.4	325	120
DSSB-CT-10PT-1500	60"	1500	10 X 0.4	384	120
DSSB-CT-10PT-1800	72"	1800	10 X 0.4	467	120
DSSB-CT-10PT-2000	80"	2000	10 X 0.4	512	120
DSSB-CT-20PT-300	12"	300	20 X 0.4	102	200
DSSB-CT-20PT-400	16"	400	20 X 0.4	154	200
DSSB-CT-20PT-600	24"	600	20 X 0.4	193	200
DSSB-CT-20PT-800	32"	800	20 X 0.4	266	200
DSSB-CT-20PT-1200	48"	1200	20 X 0.4	325	200
DSSB-CT-20PT-1500	60"	1500	20 X 0.4	384	200
DSSB-CT-20PT-1800	72"	1800	20 X 0.4	467	200
DSSB-CT-20PT-2000	80"	2000	20 X 0.4	512	200

Stainless Steel Cable Tie





*Redefining Supply*  
An ISO 9001 &  
14001 Company

# CABLE TIE TENSIONING TOOLS

### STAINLESS STEEL CABLE TIE TENSIONING TOOLS

Item Code	Cutting Width (mm)	Feature	For Type of Cable Tie
DSSB-TIE-EN335LQG	3.8 - 9.0	Tension & Cut Off	Stainless Stell Tie
DSSB-TIE-EN335SSG	3.8 - 9.0	Automatic Cut Off When Tension is Reached	Stainless Stell Tie



DSSB-TIE-EN335LQG



DSSB-TIE-EN335SSG

### NYLON CABLE TIE TENSIONING TOOLS

Item Code	Cutting Width (mm)	Length	Weight	
DSSB-TIE-ENFT-500	2.4 - 4.8	160	0.205	
DSSB-TIE-ENFT-519	2.4 - 9.0	195	0.26	
DSSB-TIE-ENFT-LPA	4.7 - 13.0	220	0.5	
DSSB-TIE-ENFT-600A	2.4 - 4.8	165	0.3	

Tensioning Tools



# Delta Sama Jaya Sdn.Bhd.



**DELTA SAMA JAYA**  
[www.substation.com.my](http://www.substation.com.my)

We are constantly reviewing and updating our products,  
for the latest information please call us on (+603) 9281 3778  
or visit our website at: [www.substation.com.my](http://www.substation.com.my)